

TECHNICAL SPECIFICATION



MC-VGA-XXM

Description: SLIM LINE VGA Cable, Distance up to 25 Feet, Non-Plenum


Why This Cable?

This cable utilizes a smaller gauge size allowing for a tighter bend radius, ease of installation and is overall much more flexible compared to other standard VGA cables.



Technical Specification

Connectors:	15Pin D-Sub Male
Connector Hood:	Over-Mold, Black
Cable Jacket:	PVC, Black
Cable Conductors:	32 AWG*5C Coaxial+30 AWG*8C+28AWG81P
Outer Diameter:	0.25"
Minimum Bend Radius:	2.5"
Maximum Tensile:	5 kgf
Operating/Storage Temperature:	-10°C ~ + 75°C
Operating Humidity:	50% ~ 75%
Number of Connector Mating Cycles:	100
Compliances:	RoHS, EDID, Type CMR
Available Lengths:	3', 6', 10', 15', 25'

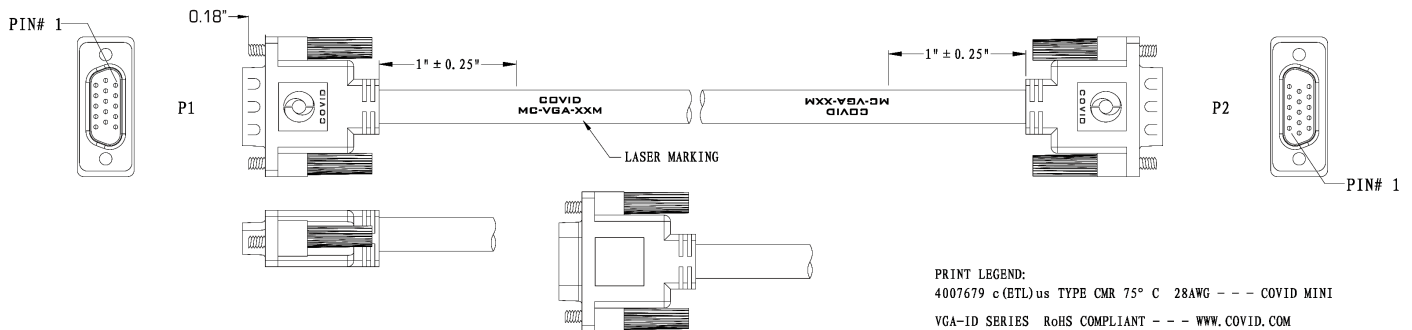

Slim Line VGA Cable - EDID Compliant
 Non-Plenum

Part Number:	MC-VGA-XXM
Revision Number:	1
Date:	2-1-2018
Page Number:	1 of 1

1723 W. 4th Street Tempe Arizona 85281

P: 800.638.6104 | F: 480.966.6728 | E: sales@covid.com | www.covid.com