

# TECHNICAL SPECIFICATION

## HD24-XXRM



**Description:** Active HDMI Cable with Ethernet, 24 AWG Construction, Distances up to 100 Feet, Non-Plenum


### Why This Cable?

This active 24 AWG cable has built-in circuitry allowing for longer cable runs. It ships complete with Covid's Spear-head pull system and T-Grip connectors for a more secure connection.



### Technical Specification

**Maximum Video Settings:** 50' = 2160P@30Hz (4K -10G) | 75' = 1080P@60Hz (12 bit) | 100' = 1080P@60Hz (8 bit)  
**Connectors:** .....HDMI, 19Pin, Male, T-Grip, Overall AU Plating  
**Connector Hood:** ..... Over-Mold, Blue  
**Cable Jacket:** ..... PVC, Black  
**Cable Conductors:** ..... 24 AWG\*5P (STP)+4C  
**Overall Shield:** .....Copper Foil with Adhesive Backing  
**Outer Diameter:** ..... 0.41"  
**Minimum Bend Radius:** ..... 4.1"  
**Maximum Tensile:** ..... 15 kgf  
**Operating/Storage Temperature:** ..... -10°C ~ + 75°C  
**Operating Humidity:** ..... 50% ~ 75%  
**Number of Connector Mating Cycles:** ..... 3000  
**Compliances:** .....RoHS, Type CMR  
**Available Lengths:**.....50ft. & 75ft. & 100ft.

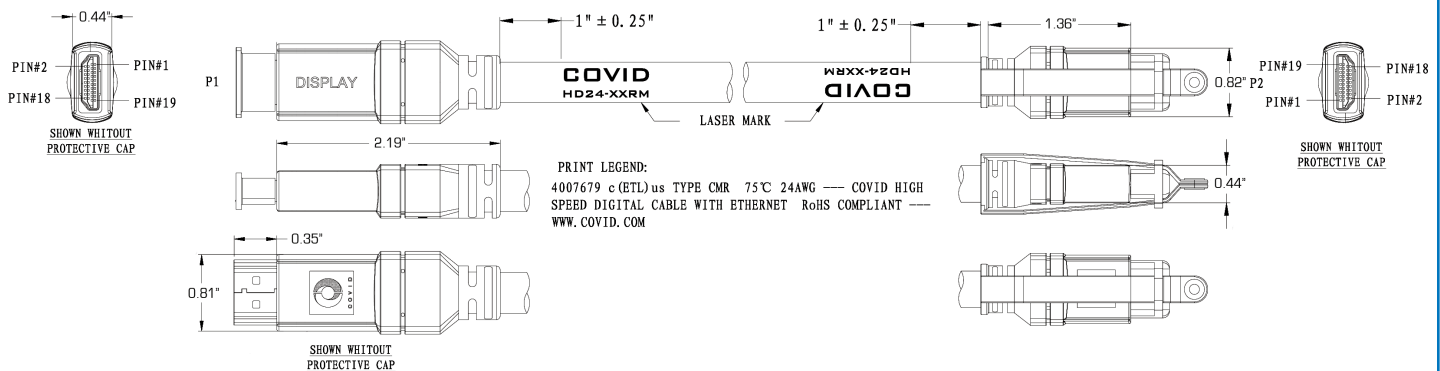

Part Number:	HD24-XXRM
Revision Number:	1
Date:	12-1-2017
Page Number:	1 of 1

Active HDMI Cable - Ethernet - 24 AWG

Non-Plenum

1723 W. 4th Street Tempe Arizona 85281

P: 800.638.6104 | F: 480.966.6728 | E: sales@covid.com | www.covid.com