


## Universal Compression Connectors

Holland Electronic's new universal compression connectors were created with the Commercial AV Installers' needs in mind. This series consists of five Universal Connectors that terminate most major brands of cable, including Plenum RG-6, RG-6, RG-59, Mini-23 AWG and Mini 25 AWG cables.

### Features:

- One Universal Connector for each Series of Cable (Including Plenum)
- Easy Insertion
- All Metal Construction
- Optimized for Digital Video Applications
- Patented Viewing Window
- Accommodates Color-Coded Application Bands (P/N: SRR)

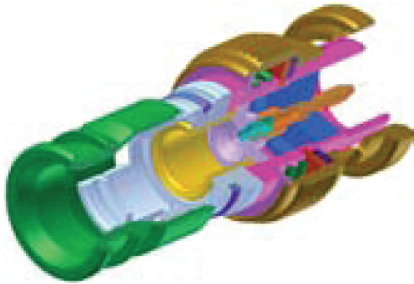

**FITS MOST COAXIAL CABLE BRANDS - Plenum RG-6, RG-6, RG-59,**

**Mini 23 & Mini 25** - Our new *MCV Universal Compression Connectors* fit a wide variety of coaxial cables that vary in size between manufacturers. Some differences often include thickness of jacket or diameter of insulation depending on variance in materials used in the cable manufacturing process.

Connector Series	59MCV	6-MCV	6-MCVL
Covid Cable Part Number			
CVD 1100 95	X	X	
CVD 1100-95F	X		
CVD 3100 95	X		
CVD 3100 95F	X		
COV 1100 95			X
COV 1100 95F		X	X
COV 3100 95	X	X	
COV 1100 60F		X	X
COV 3100 60F		X	
COV 1100 CQ			X
COV 3100 CQ			X



### AVAILABLE IN BNC, RCA AND F

Frequency Range	DC - 3,000 MHz	
Return Loss (1 GHz)	> -27dB	
Return Loss (3 GHz)	> -21dB	
Insertion Loss (1 GHz)	< .15 dB Max	
	(The above test results from BNC6-MCVL)	
	Jacket O.D. Range	Pull Force
RG59 MCV	5.8 - 6.1	55 lbs. typical
RG6 MCV	5.6 - 6.9	70 lbs. typical
RG6 MCVL	6.6 - 7.4	70 lbs. typical
SLC1855-FPU	3.7 - 4.1	40 lbs. typical
SLC-MINI25U	2.7 - 2.9	30 lbs. typical

### MCV™ Series 59 & 6

U.S. Patent #: 7,112,093  
7,264,502  
6,929,508

### WORKS WITH MOST COMPRESSION TOOLS



RG-6 & RG-59 - Fits all standard 21MM Compression Tools  
Mini 23 & 25 AWG - Fits all standard 29.8MM Compression Tools